
versatile™ 4C Surface Mount Collar, SM14S 17¹/₁₆" ACTUAL → 185/₁₆" ACTUAL |-**DEPTH** 52½" ACTUAL $13\frac{1}{16}$ " FROM FINISHED FLOOR TO BOTTOM OF COLLAR FINISHED FLOOR

Notes:

- Designed to mount Florence Versatile[™] 4C mailbox single column 14-High Suite modules (sold separately).
- 2. For use with front loading modules only.

PRODUCT SERIES: VERSATILETM 4C SURFACE MOUNT COLLAR				
	MODEL SM14S	REV B		
	SCALE NONE	TAST REV DATE 7/02/2014		
	DRAWING NUMBER	DRAWN BY		
	SM14SCS	TNS		

versatileTM 4C Mailbox, 4C14S-2P

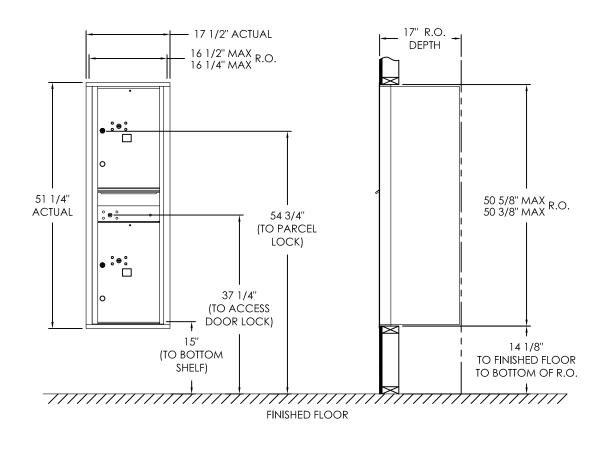

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1
PARCEL	PL6	20-1/2" H x 12" W x 15" D	2

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

SCALE NONE LAST REV DATE 07/08/19 DRAWING NUMBER DRAWN BY 4C14S-2PCS RAK	MODEL 40	C14S-2P	REV	В
	SCALE	NONE	LAS	t rev date 07/08/19
4C14S-2PCS RAK	DRAWING	NUMBER		DRAWN BY
	4C	14S-2PCS		RAK