


DRAWING NUMBER

SM15SCS

DRAWN BY

TNS

## versatile<sup>TM</sup> 4C Mailbox, 4C15S-3P

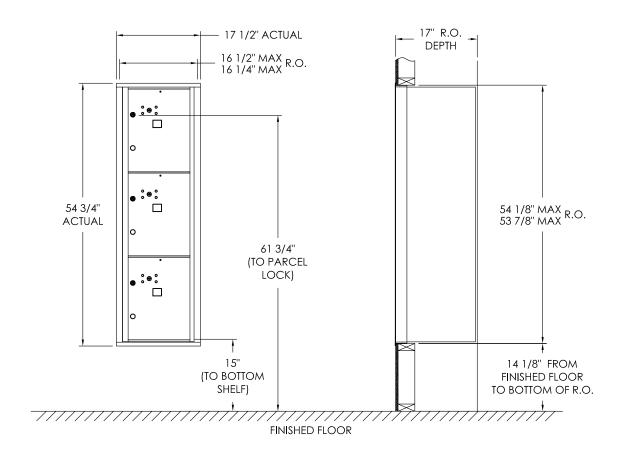

## COMPARTMENT CHART

## DESCRIPTION COMPARTMENT COMPARTMENT SIZE QTY. PARCEL PL5 17" H x 12" W x 15" D 3

## Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
  - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
  - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
  - c. No patron (tenant) lock shall be positioned more than 67" AFF.
  - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
  - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

MODEL4C	15S-3P	REV	Е
SCALE	NONE	LAS	t rev date 07/08/19
DRAWING	NUMBER		DRAWN BY
4C	15S-3PCS		RAK