

versatile™ 4C Depot, DEP06S

Shown with 4C for dimensional reference only.

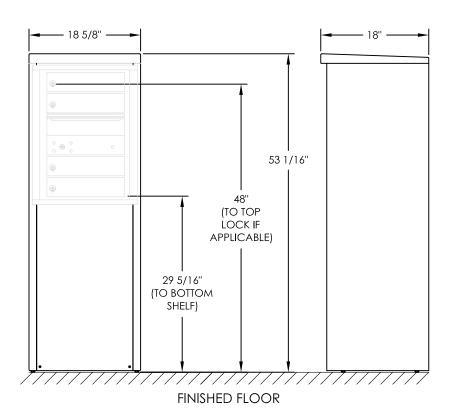

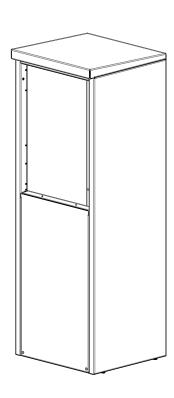


NOTES:

- 1. Depot cabinet design ensures compliance with USPS STD-4C mailbox installation regulations.
- 2. Accommodates all 4C front-loading single-column 6-High modules.
- 3. Depot cabinet assembled complete in factory.
- 4. Depot ships complete with 4C front-loading module installed.
- 5. May be installed outside or inside see foundation specification details in installation manual.

PRODUCT SERIES:	VERSATILE ™ 4C DEPOT			
		MODEL DEPO6S	REV	-
		SCALE 1:16	LAS1	REV DATE 10/6/2020
		DRAWING NUMBER		DRAWN BY
		DEP06SC	S	NBC

versatile™ 4C Mailbox, 4C06S-02

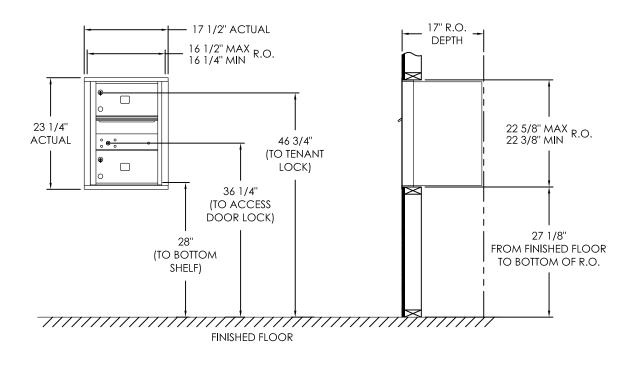

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB2	6-1/2" H x 12" W x 15" D	2
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

MODEL 4C06S-02	REV C	
SCALE NONE L	LAST REV DATE 06/28/19	
DRAWING NUMBER	DRAWN BY	
4C06S-02CS	RAK	