


versatile™ 4C Mailbox, 4C16S-03

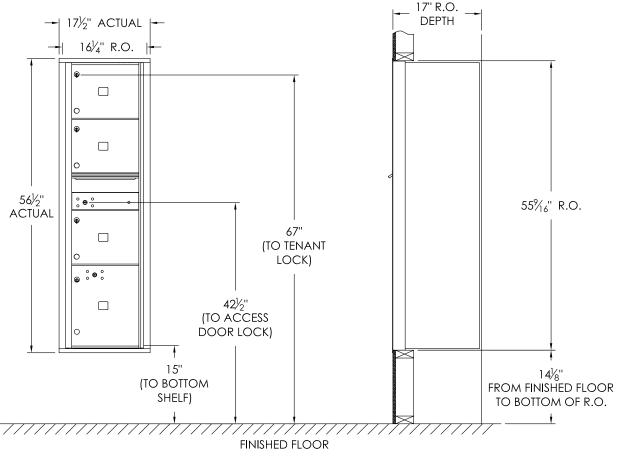

COMPARTMENT CHART

| DESCRIPTION | COMPARTMENT | COMPARTMENT SIZE | QTY. |
|---------------|-------------|--------------------------|------|
| MAILBOX | MB3 | 10" H x 12" W x 15" D | 3 |
| OUTGOING MAIL | OM2 | 6-1/2" H x 12" W x 15" D | 1 |
| PARCEL LOCKER | PL15 | 15" H x 12" W x 15" D | 1 |

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) 11/8".

| Pl | RODUCT SERIES: | VERSATILE TM | 4C FRONT | LOAD | MAILBOX |
|----|----------------|-------------------------|----------|------|---------|
| | | | | | |

| ′ C | REV | ·C16S-03 | MODEL 4 |
|----------|-----|----------|---------|
| 2/23/17 | LAS | NONE | SCALE |
| DRAWN BY | | NUMBER | DRAWING |
| NBC | | 16S-03CS | 4C |
| | | | |