


versatileTM 4C Mailbox, 4C16S-09

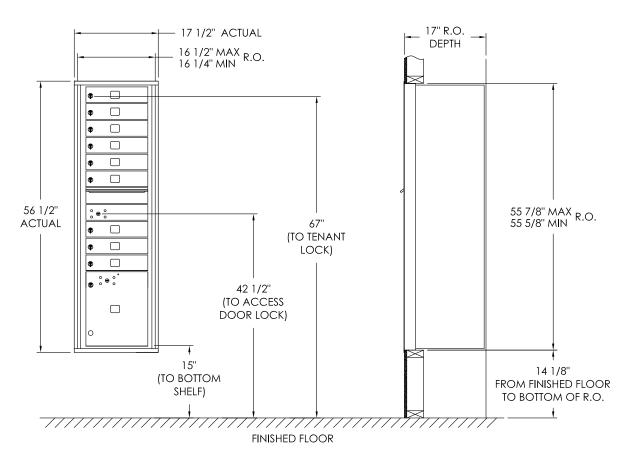

PRODUCT SERIES:

COMPARTMENT CHART

4C16S-09CS

RAK

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	9
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1
PARCEL LOCKER	PL15	15" H x 12" W x 15" D	1

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

V LIKO/ KIILL	1011(01(1 20) (5 1(1)	WED O /			
		MODEL 2	4C16S-09	REV	D
		SCALE	NONE	LAS [*]	t rev date 06/27/19
		DRAWING	NUMBER		DRAWN BY

VERSATILETM 4C FRONT LOAD MAILBOX