versatileTM 4C Surface Mount Collar, SM09D 17¹/₆" ACTUAL 32³/₈" ACTUAL DEPTH ACTUAL


261/16" FROM FINISHED FLOOR TO BOTTOM OF COLLAR

Notes:

- Designed to mount Florence Versatile[™] 4C mailbox double column 9-High Suite modules (sold separately).
- 2. For use with front loading modules only.

PRODUCT SERIES:	VERSATILE™ 4C SURFACE MOUN	NT COL	LAR		
		MODEL	SM09D	REV	В
		SCALE	NONE	LAS	T REV DATE 7/02/2014
		DRAWIN	NG NUMBER		DRAWN BY
			SM09DCS		TNS

versatile™ 4C Mailbox, 4C09D-04

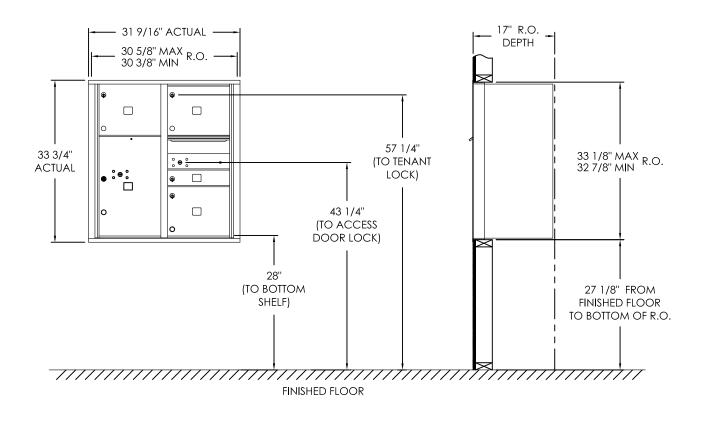

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	1
MAILBOX	MB3	10" H x 12" W x 15" D	3
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1
PARCEL	PL6	20-1/2" H x 12" W x 15" D	1

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

_	
4C09D-04 REV F	MODEL 4C09D-04
NONE LAST REV DATE 07/02/19	scale NONE
G NUMBER DRAWN BY	DRAWING NUMBER
C09D-04CS RAK	4C09D-04CS