
versatileTM 4C Mailbox, 4C08S-2P

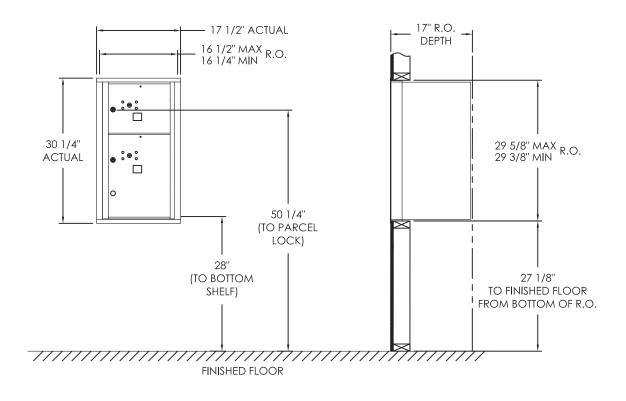

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
PARCEL	PL3	10" H x 12" W x 15" D	1
PARCEL	PL5	17" H x 12" W x 15" D	1

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

MODEL 4C08S-2P REV C SCALE NONE LAST REV DATE 07/01/19 DRAWING NUMBER DRAWN BY 4C08S-2PCS RAK		
DRAWING NUMBER DRAWN BY	MODEL 4C08S-2P	SEV C
	SCALE NONE L	O7/01/19
4C08S-2PCS RAK	DRAWING NUMBER	DRAWN BY
	4C08S-2PCS	RAK