


versatile™ 4C Mailbox, ADA Max Height Suite

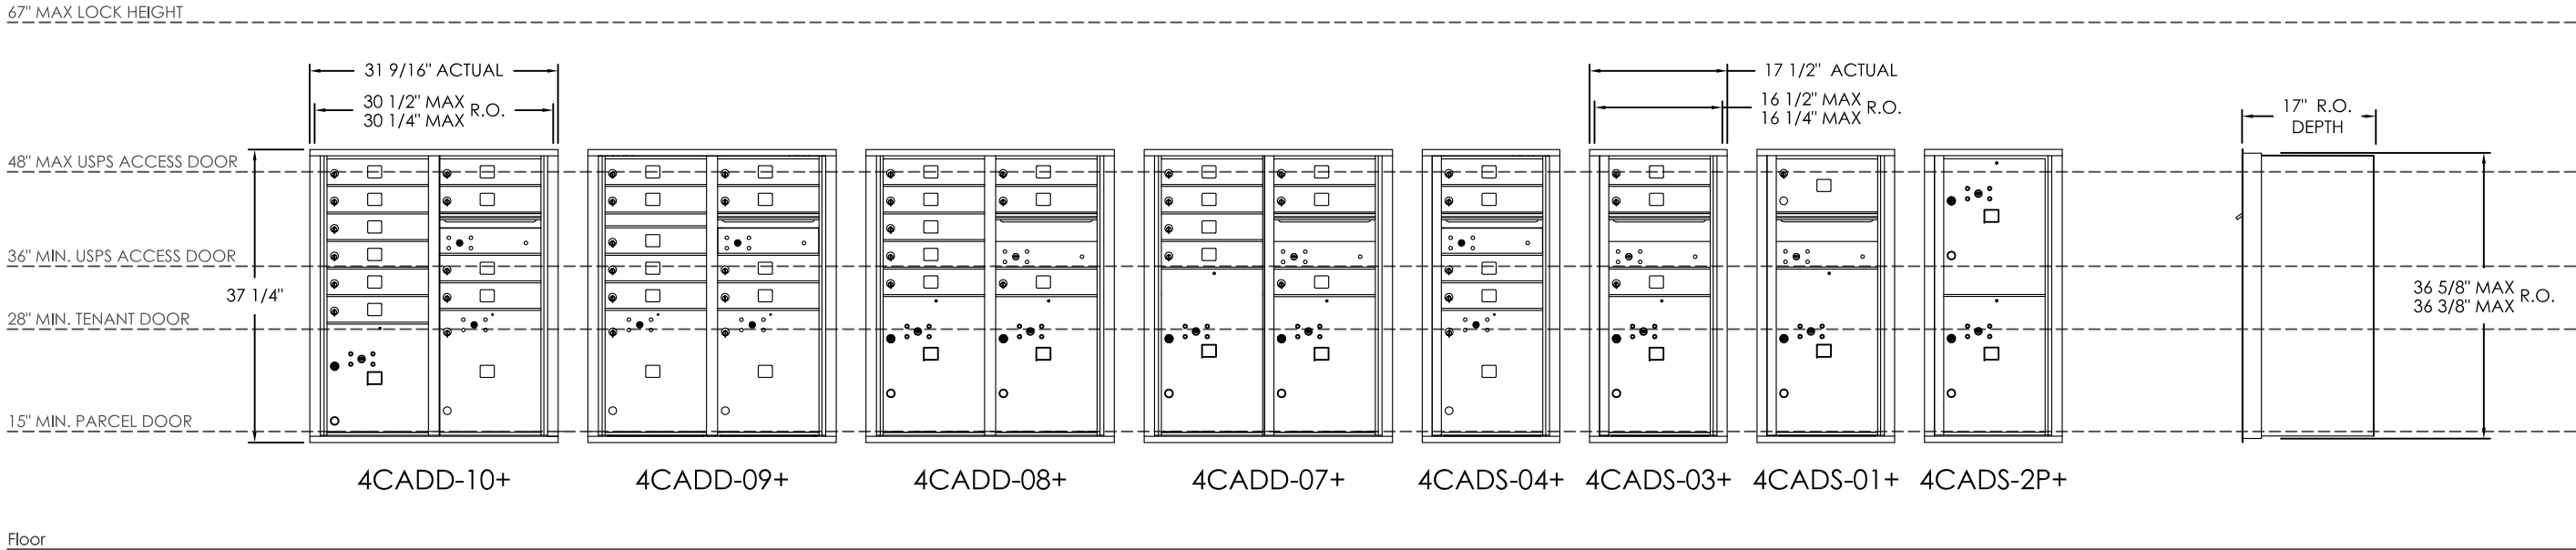

- Notes:
- 1. Below are the USPS STD-4C installation guidelines:
    - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
    - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
    - c. No patron (tenant) lock shall be positioned more than 67" AFF.
    - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
    - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
  - 2. Modules noted with \* do not meet USPS STD-4C guidelines above..
  - 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator:  
[www.florencemailboxes.com/configurator](http://www.florencemailboxes.com/configurator).

|                                                            |                |         |                           |
|------------------------------------------------------------|----------------|---------|---------------------------|
| PRODUCT SERIES: versatile™ 4C Mailbox ADA Max Height Suite |                |         |                           |
|                                                            | MODEL          | 4CADA   | REV B                     |
|                                                            | SCALE          | NONE    | LAST REV DATE 08/08/2019  |
|                                                            | DRAWING NUMBER | 4CADACS | DRAWN BY RAK SHEET 1 OF 1 |