
versatile™ 4C Mount Mailbox, 4C06D-05

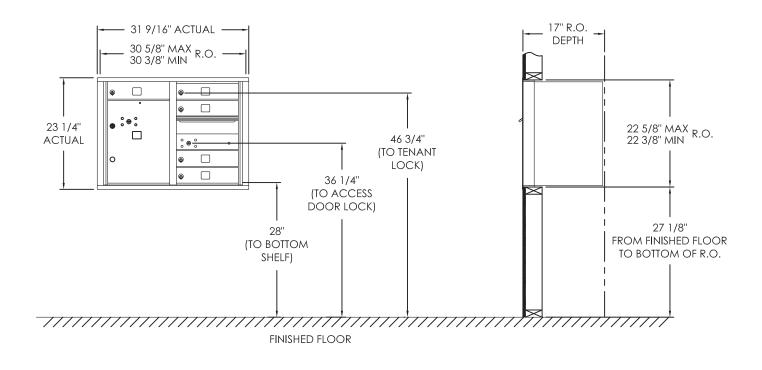

DESCRIPTION COMPARTMENT COMPARTMENT SIZE QTY. MAILBOX MB1 3" H x 12" W x 15" D 5 OUTGOING MAIL OM2 6-1/2" H x 12" W x 15" D 1 PARCEL PL5 17" H x 12" W x 15" D 1

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

MODEL 40	C06D-05	REV	Е
SCALE	NONE	LAS	T REV DATE 06/28/19
DRAWING	NUMBER		DRAWN BY
40	C06D-05		RAK