


versatile™ 4C Mailbox, Max Height Suite

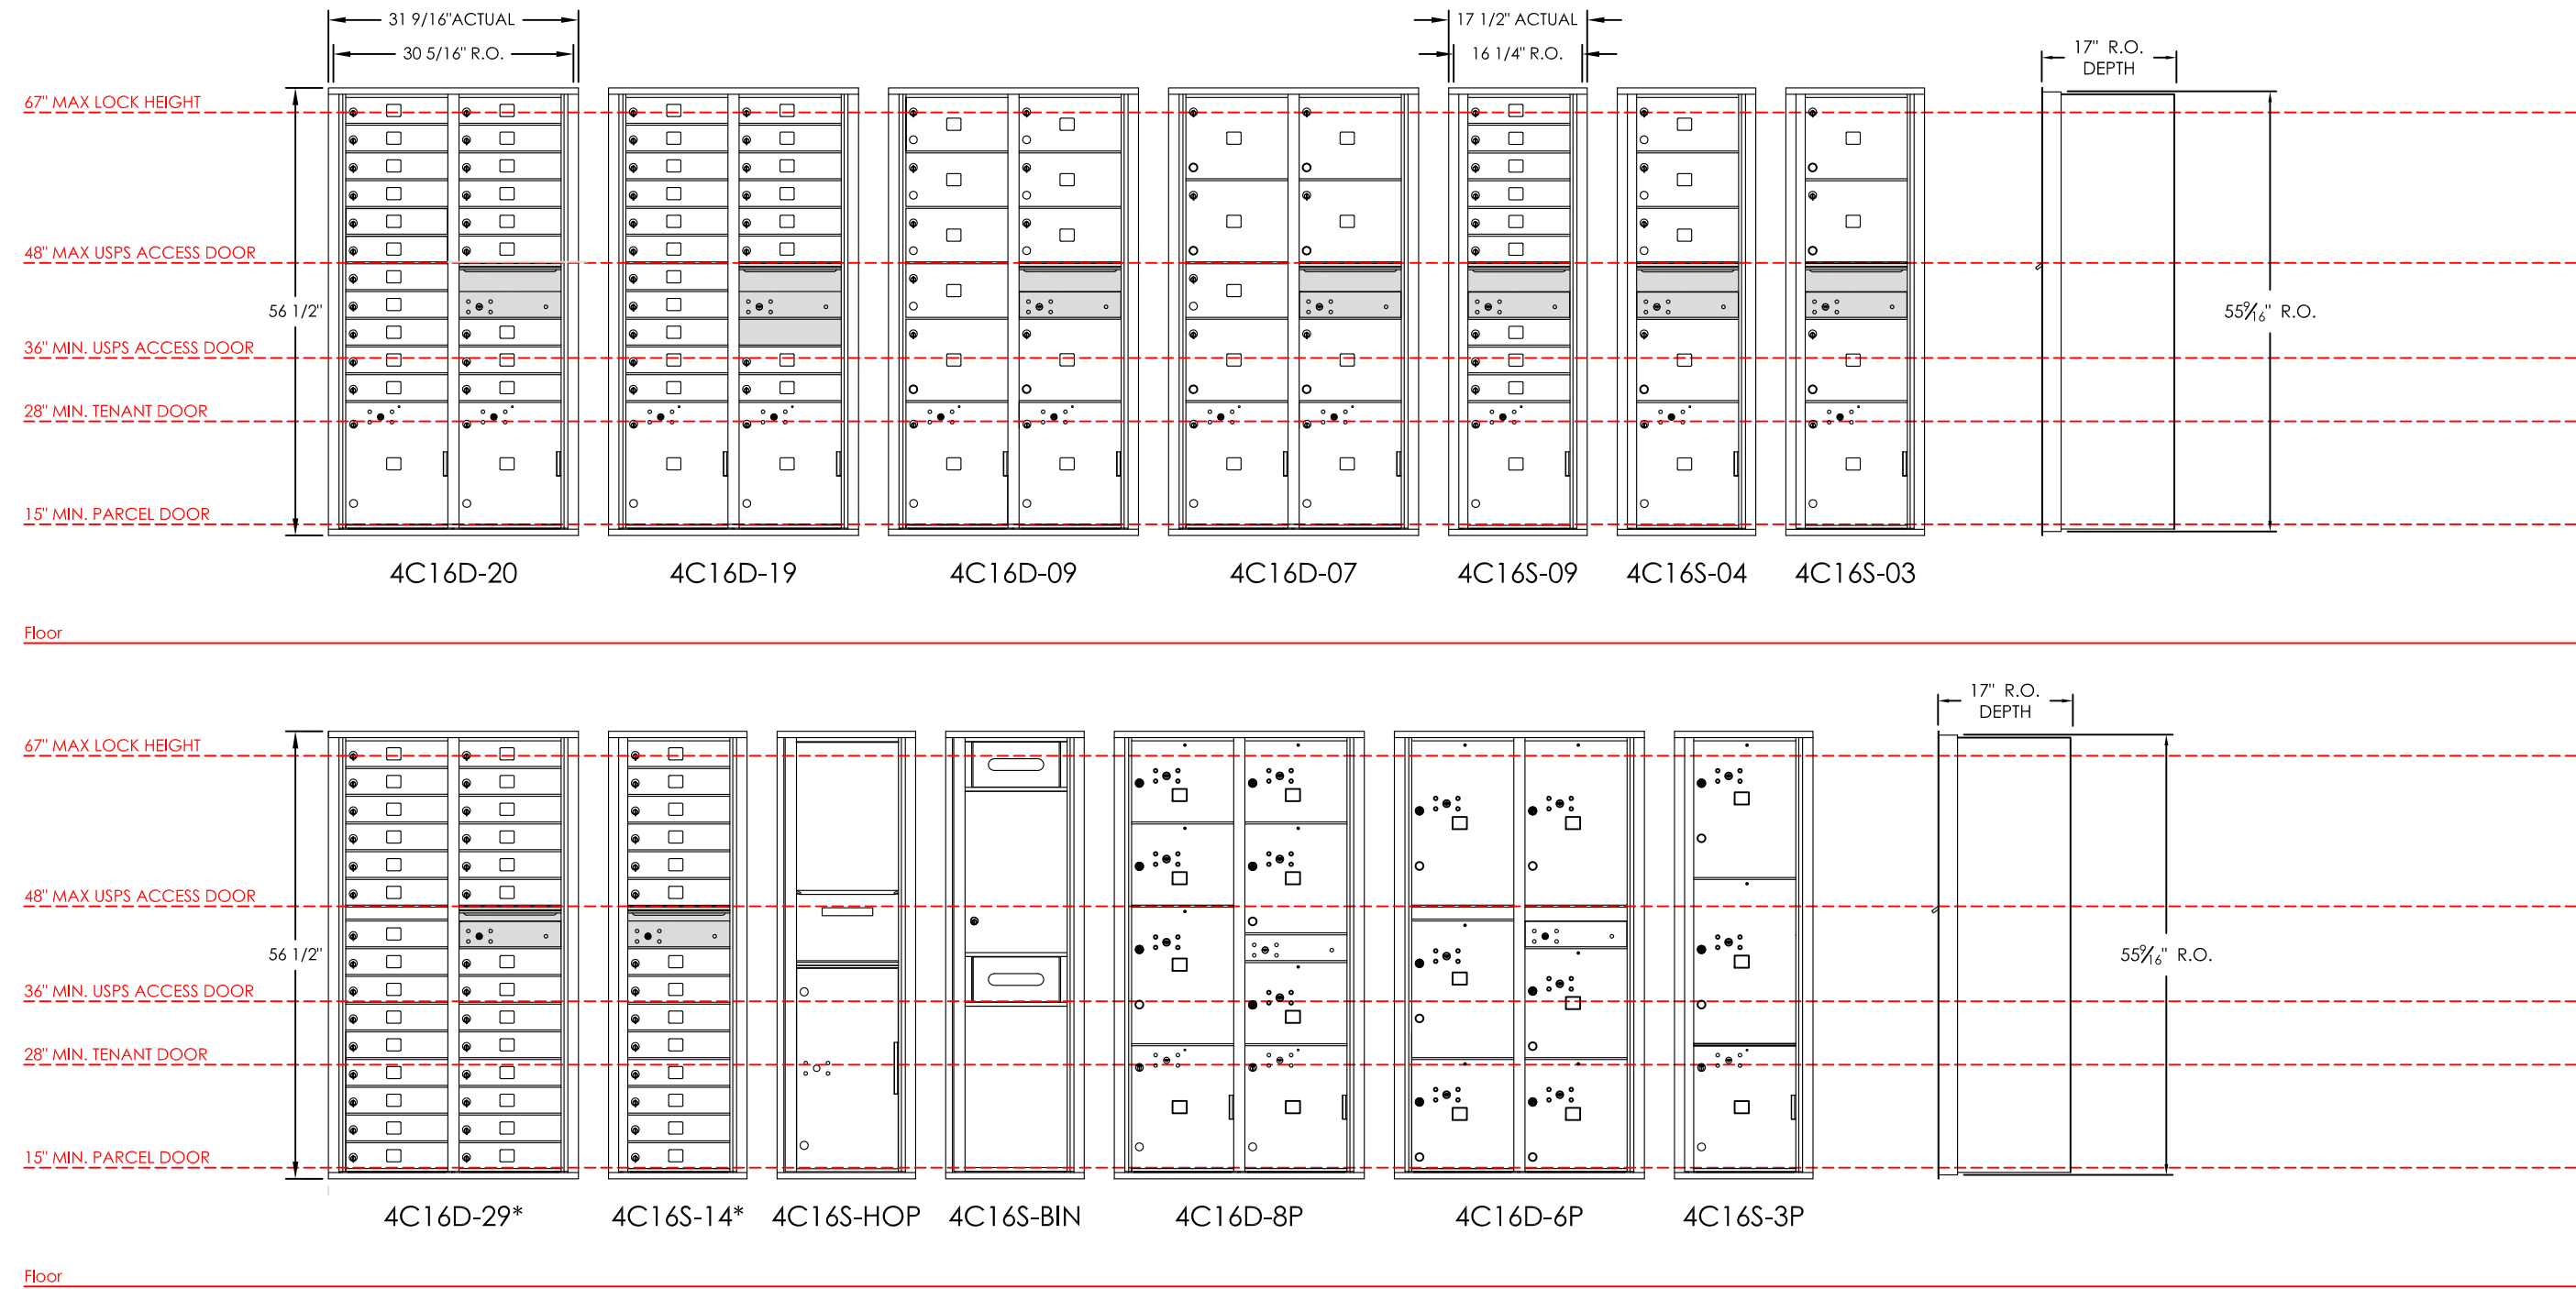

- NOTES:
1. Below are the USPS STD-4C installation guidelines:
- a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36" - 48" AFF.
2. Modules noted with * do not meet USPS STD-4C guidelines above.

PRODUCT SERIES: versatile™ 4C Mailbox Max Height Suite		
MODEL	4CMAX	REV A
SCALE	NONE	LAST REV DATE 5/15/2014
DRAWING NUMBER	4CMAXCS	DRAWN BY AFD
		SHEET 1 OF 1