versatile™ 4C Depot, DEPADAS

18 5/8"

18"

Shown with 4C for dimensional reference only.

53 1/16"

48"
(TO TOP LOCK IF APPLICABLE)

15 5/16"
(TO BOTTOM SHELF)

FINISHED FLOOR
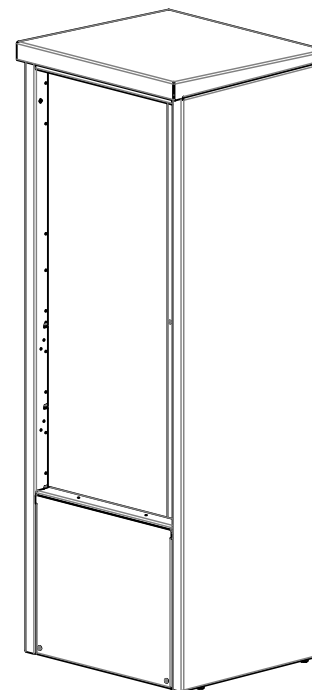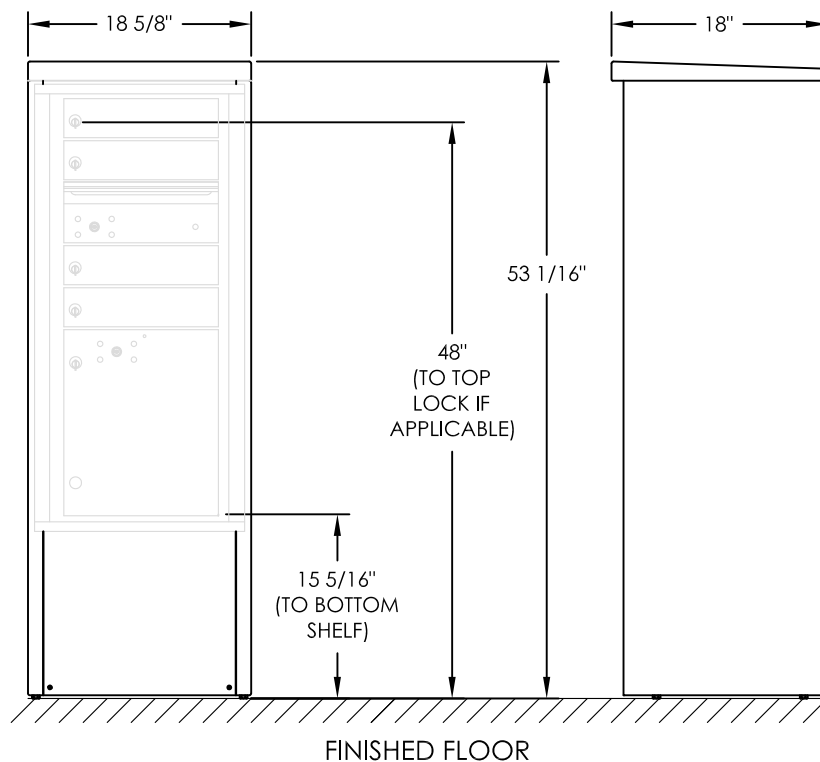
NOTES:
1. Depot cabinet design ensures compliance with USPS STD-4C mailbox installation regulations.
2. Accommodates all 4C front-loading single-column ADA-High modules.
3. Depot cabinet assembled complete in factory.
4. Depot ships complete with 4C front-loading module installed.
5. May be installed outside or inside - see foundation specification details in installation manual.
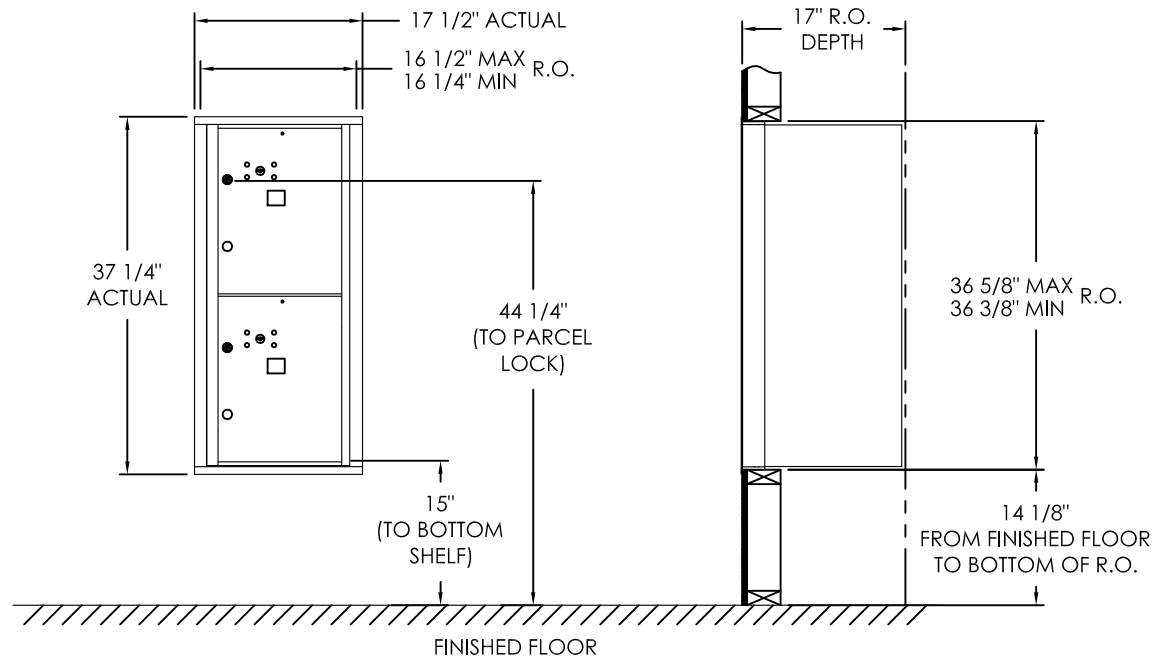
versatile™ 4C Mailbox, 4CADS-2P

17 1/2" ACTUAL

16 1/2" MAX R.O.
16 1/4" MIN

17" R.O.
DEPTH

37 1/4"
ACTUAL

44 1/4"
(TO PARCEL
LOCK)

36 5/8" MAX R.O.
36 3/8" MIN

15"
(TO BOTTOM
SHELF)

14 1/8"
FROM FINISHED FLOOR
TO BOTTOM OF R.O.

FINISHED FLOOR

Notes:

1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
    a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
    b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
    c. No patron (tenant) lock shall be positioned more than 67" AFF.
    d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
    e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
2. This 4C mailbox can also be used for private applications.
3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
PARCEL	PL5	17" H x 12" W x 15" D	2

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MALBOX

MODEL 4CADS-2P	REV B
SCALE NONE	LAST REV DATE 06/29/19
DRAWING NUMBER 4CADS-2PCS	DRAWN BY RAK